Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

controller M200 40 IO relay



TM200C40R

Main

Range of product	Easy Modicon M200	
Product or component type	Logic controller	
[Us] rated supply voltage	100240 V AC	
Discrete I/O number	40	
Discrete input number	1215: 4 fast input 10, 11, 16, 17: 4 high speed input 18123: 16 regular input	
Discrete output number	16 relay	
Discrete input voltage	24 V	
Discrete input voltage type	DC	
Discrete input current	7 mA for input	
Discrete input logic	Sink or source (positive/negative) type 1 conforming to IEC 61131-2	
Discrete output voltage	24 V DC 220 V AC	
Discrete output current	2 A	
Discrete output type	Relay normally open	
Power consumption in VA	5969 VA at 100240 V AC (with max I/O)	

Complementary

Complementary		
Maximum number of I/O expansion module	4 with 128 discrete output(s) for transistor output 4 with 80 discrete output(s) for relay output	
Supply voltage limits	85264 V	
Network frequency	50/60 Hz	
Inrush current	50 A	
Voltage state 1 guaranteed	>= 15 V for input	
Voltage state 0 guaranteed	<= 5 V for input	
Input impedance	3.3 kOhm for discrete input	
Response time	5 μs turn-off, I0, I1, I6, I7 terminal(s) for high speed input 5 μs turn-on, I0, I1, I6, I7 terminal(s) for high speed input 100 μs turn-off, I2I5 terminal(s) for fast input 35 μs turn-on, I2I5 terminal(s) for fast input	

100 µs turn-off, I2...I5 terminal(s) for fast input 35 µs turn-on, I2...I5 terminal(s) for fast input 100 µs turn-off, I8...I13 terminal(s) for regular input 35 µs turn-on, I8...I13 terminal(s) for regular input 10 ms turn-off, Q0...Q15 terminal(s) for relay output 10 ms turn-on, Q0...Q15 terminal(s) for relay output 125 µs turn-off, I14...I23 terminal(s) for regular input 55 µs turn-on, I14...I23 terminal(s) for regular input

Configurable filtering time	0 ms for input 3 ms for input	
	12 ms for input	
Output voltage limits	30 V DC 250 V AC	
Maximum current per output common	4 A at COM 2 4 A at COM 0	
	4 A at COM 1 4 A at COM 3	
Electrical durability	100000 cycles AC-12, 240 V, 480 VA, resistive	
	100000 cycles DC-12, 24 V, 48 W, resistive	
Switching frequency	0.1 Hz with maximum load	
Mechanical durability	20000000 cycles for relay output	
Minimum load	10 mA at 5 V DC for relay output	
Memory capacity	512 byte internal flash for backup of programs	
Data storage equipment	32 GB micro SD card (optional)	
Battery type	BR2032 Li-CFx (Lithium-Carbon Monofluoride), battery life: 5 year(s)	
Backup time	3 years at 25 °C (by interruption of power supply)	
Execution time for 1 KInstruction	0.3 ms for event and periodic task	
Execution time per instruction	0.2 μs Boolean	
Exct time for event task	60 µs response time	
Clock drift	<= 90 s/month at 25 °C	
Regulation loop	Adjustable PID regulator up to 14 simultaneous loops	
Control signal type	Quadrature (x1, x2, x4) at 100 kHz for fast input (HSC mode) Pulse/direction at 100 kHz for fast input (HSC mode)	
	Single phase at 100 kHz for fast input (HSC mode)	
Counting input number	CW/CCW at 100 kHz for fast input (HSC mode) 4 fast input (HSC mode) at 100 kHz 32 bits	
Integrated connection type	USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with terminal block connector and RS485 interface Non isolated serial link serial 2 with terminal block connector and RS232/RS485 interface	
	Isolated serial link serial 2 with terminal block connector and RS485 interface	
Transmission rate	1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 12 Mbit/s for USB	
Communication port protocol	USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network	
Local signalling	1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD) 1 LED (red) for BAT 1 LED (green) for SL1 1 LED per channel (green) for I/O state	
Electrical connection	Mini B USB 2.0 connectorfor a programming terminal removable screw terminal blockfor inputs removable screw terminal blockfor outputs removable screw terminal block, 4 terminal(s) for connecting the serial link1 removable screw terminal block, 3 terminal(s) for connecting the 100-240 V AC power supply	
Maximum cable distance between devices	Unshielded cable: <50 m for input Shielded cable: <10 m for fast input Shielded cable: <10 m for high speed input Unshielded cable: <150 m for output	

Insulation	Non-insulated between inputs Between output and internal logic at 1780 V AC Between output groups at 1780 V AC Between supply and internal logic at 1780 V AC Between input and internal logic at 500 V AC Between fast input and internal logic at 500 V AC Between input groups at 500 V AC	
Sensor power supply	24 V DC at 300 mA supplied by the controller	
Marking	CE	
Mounting support	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 plate or panel with fixing kit conforming to IEC 60715	
Height	90 mm	
Depth	70 mm	
Width	175 mm	
Net weight	0.504 kg	
Environment		
IP degree of protection	IP20 with protective cover in place	
Product certifications	IACS E10 cULus RCM CSA	
Standards	IEC 61010-2-201 IEC 61131-2	
Electromagnetic compatibility	Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to IEC 61000-4-2 Electrostatic discharge immunity test - test level: 6 kV (contact discharge) conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80 MHz3 GHz) conforming to IEC 61000-4-3 Magnetic field at power frequency - test level: 30 A/m conforming to IEC 61000-4-8 Electrical fast transient/burst immunity test - test level: 2 kV (power lines) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 2 kV (relay output) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (I/O) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (serial link) conforming to IEC 61000-4-4 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (DC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 2 kV (relay output) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 2 kV (relay output) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (I/O) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (DC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to IEC 61000-4-5 1.2/50 μs shock waves imm	

Shock resistance

15 gn for 11 ms 30 gn for 6 ms

Immunity to microbreaks	10 ms	
Vibration resistance	3.5 mm at 58.4 Hz on symmetrical rail 1 gn at 8.4150 Hz on symmetrical rail 3.5 mm at 58.7 Hz on panel mounting 2 gn at 8.7150 Hz on panel mounting	
Relative humidity	1095 %, without condensation (in operation) 1095 %, without condensation (in storage)	
Ambient air temperature for operation	055 °C (horizontal installation)	
Ambient air temperature for storage	-2570 °C	
pollution degree	<= 2	
Operating altitude	02000 m	
Storage altitude	03000 m	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.388 cm
Package 1 Width	13.744 cm
Package 1 Length	18.809 cm
Package 1 Weight	767.5 g
Unit Type of Package 2	\$03
Number of Units in Package 2	12
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	9716 g
Unit Type of Package 3	P12
Number of Units in Package 3	288
Package 3 Height	95 cm
Package 3 Width	80 cm
Package 3 Length	120 cm
Package 3 Weight	242184 g



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	4604
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration

Use Again


○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No


TM200C40R

Dimensions Drawings

Dimensions Drawings

Dimensions




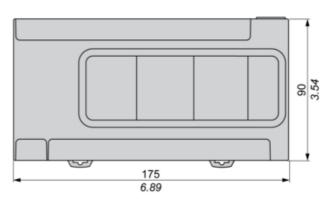


Mounting and Clearance

Mounting and Clearance

Mounting on a Rail




Direct Mounting on a Panel Surface

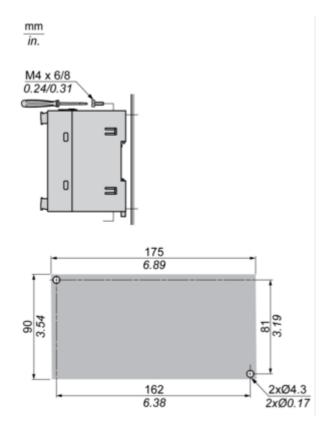

Mounting Position

TM200C40R

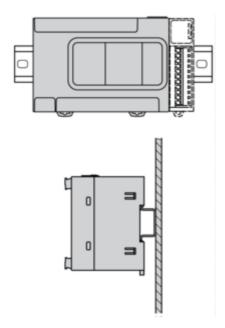

TM200C40R












Clearance

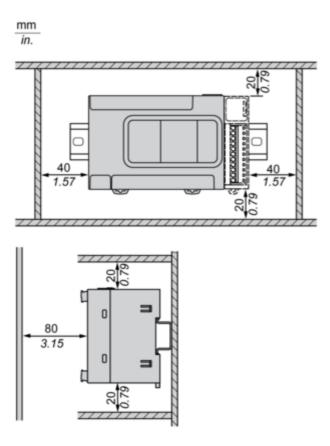



TMCR2•••Installation

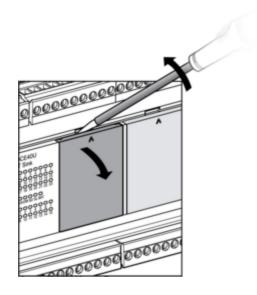


TM200C40R

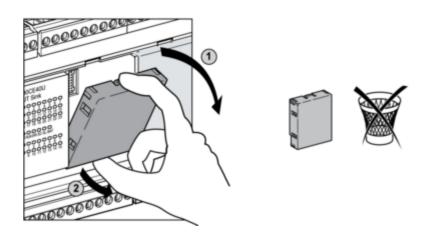


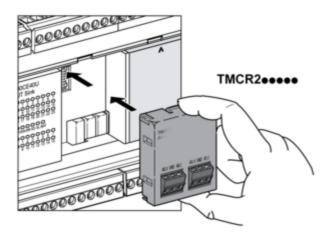


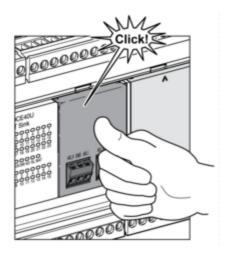


TMCR2 ••• De-Installation

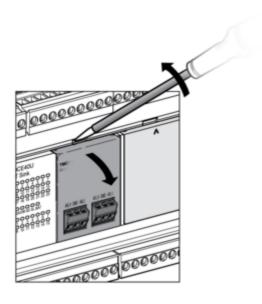



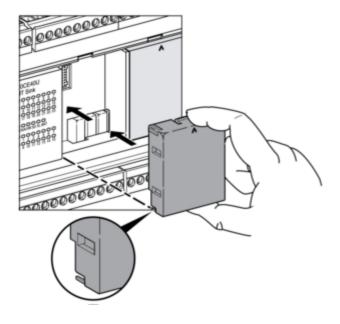


TM200C40R




Connections and Schema

Wiring Diagram / Connections Schema


AC Power Supply



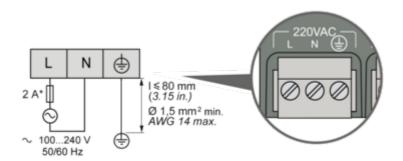

(*) Type T fuse


Digital Inputs Positive Logic (Sink)

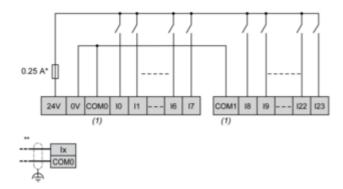

- (*) Type T fuse
- (**) Fast inputs
- (1) The COM0 and COM1 terminals are **not** connected internally.


Digital Inputs Negative Logic (Source)


TM200C40R

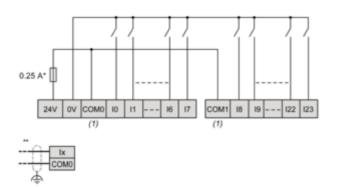


- (*) Type T fuse
- (**) Fast inputs
- (1) The COM0 and COM1 terminals are **not** connected internally.

Relay Outputs - Negative Logic (Sink)

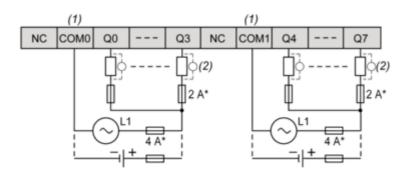

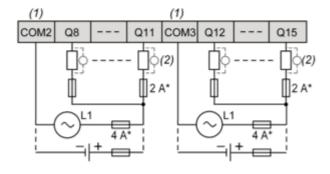






- (*) Type T fuse
- (1) The COM0 and COM1 terminals are **not** connected internally.
- (2) A free wheeling diode or an RC snubber

Relay Outputs - Positive Logic (Source)

TM200C40R

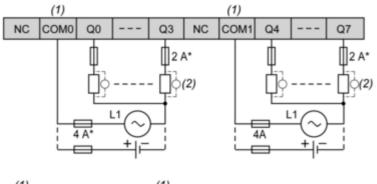


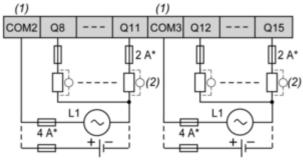




- (*) Type T fuse
- (1) The COM0 and COM1 terminals are **not** connected internally.
- (2) A free wheeling diode or an RC snubber

USB Mini-B Connection

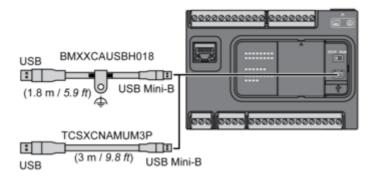

SL1 Connection

TM200C40R

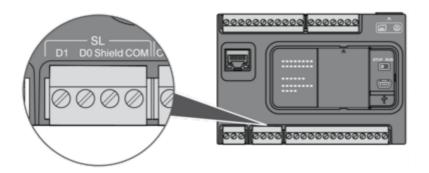

D1: D1 (A+) **D0**: D0 (B-) **Shield**: Shield **COM**: O V Com