

# logic controller, Modicon M221, 16 IO, 9 DI, 7 DO, transistor, PNP, Ethernet

TM221CE16T

#### Main

Range of product	Modicon M221	
Product or component type	Logic controller	
[Us] rated supply voltage	24 V DC	
Discrete input number	9, discrete input 4 fast input conforming to IEC 61131-2 Type 1	
Analogue input number	2 at 010 V	
Discrete output type	Transistor	
Discrete output number	7 transistor 2 fast output	
Discrete output voltage	24 V DC	
Discrete output current	0.5 A	

## Complementary

oompicmentary		
Discrete I/O number	16	
Maximum number of I/O expansion module	4 (local I/O-Architecture) 11 (remote I/O-Architecture)	
Supply voltage limits	20.428.8 V	
Inrush current	35 A	
Maximum power consumption in W	11 W at 24 V (with max number of I/O expansion module) 4.6 W at 24 V (without I/O expansion module)	
Power supply output current	0.325 A 5 V for expansion bus 0.15 A 24 V for expansion bus	
Discrete input logic	Sink or source (positive/negative)	
Discrete input voltage	24 V	
Discrete input voltage type	DC	
Analogue input resolution	10 bits	
LSB value	10 mV	
Conversion time	1 ms per channel + 1 controller cycle time for analogue input analog input	
Permitted overload on inputs	+/- 30 V DC for 5 min (maximum) for analog input +/- 13 V DC (permanent) for analog input	
Voltage state 1 guaranteed	>= 15 V for input	
Voltage state 0 guaranteed	<= 5 V for input	
Discrete input current	7 mA for discrete input 5 mA for fast input	
Input impedance	3.4 kOhm for discrete input 100 kOhm for analog input 4.9 kOhm for fast input	

Response time	35 µs turn-off, 1215 terminal(s) for input 5 µs turn-on, 10, 11, 16, 17 terminal(s) for fast input 35 µs turn-on, other terminals terminal(s) for input 5 µs turn-off, 10, 11, 16, 17 terminal(s) for fast input 100 µs turn-off, other terminals terminal(s) for input 5 µs turn-on, turn-off, Q0Q1 terminal(s) for output 50 µs turn-on, turn-off, Q2Q3 terminal(s) for output 300 µs turn-on, turn-off, other terminals terminal(s) for output
Configurable filtering time	0 ms for input 3 ms for input 12 ms for input
Discrete output logic	Positive logic (source)
Maximum current per output common	3.5 A
Output frequency	100 kHz for fast output (PWM/PLS mode) at Q0Q1 5 kHz for output at Q2Q3 0.1 kHz for output at Q4Q6
Absolute accuracy error	+/- 1 % of full scale for analog input
Maximum leakage current	0.1 mA for transistor output
Maximum voltage drop	<1 V
Mechanical durability	20000000 cycles for transistor output
Maximum tungsten load	<12 W for output and fast output
Protection type	Overload and short-circuit protection at 1 A
Reset time	1 s automatic reset
Memory capacity	256 kB for user application and data RAM with 10000 instructions 256 kB for internal variables RAM
Data backed up	256 kB built-in flash memory for backup of application and data
Data storage equipment	2 GB SD card (optional)
Battery type	BR2032 or CR2032X lithium non-rechargeable
Backup time	1 year at 25 °C (by interruption of power supply)
Execution time for 1 KInstruction	0.3 ms for event and periodic task
Execution time per instruction	0.2 μs Boolean
Exct time for event task	60 μs response time
Maximum size of object areas	512 %M memory bits 255 %C counters 512 %KW constant words 255 %TM timers 8000 %MW memory words
Realtime clock	With
Clock drift	<= 30 s/month at 25 °C
Regulation loop	Adjustable PID regulator up to 14 simultaneous loops
Positioning functions	Position PTO 2 axe(s)pulse/direction mode (100 kHz) Position PTO 1 axe(s)CW/CCW mode (100 kHz)
Function available	PWM Frequency generator PLS
Counting input number	4 fast input (HSC mode) at 100 kHz 32 bits
counter function	Single phase A/B Pulse/direction
Integrated connection type	USB port with mini B USB 2.0 connector  Non isolated serial link serial 1 with RJ45 connector and RS232/RS485 interface  Ethernet with RJ45 connector

s length of 15 m for RS485 s length of 3 m for RS232
RTU/ASCII or SoMachine-Network
per cable
us)
24 V DC power supply
C rnal logic
715 1715

Standards	IEC 61131-2 UL 508 CAN/CSA C22.2 No. 213 IACS E10 ANSI/ISA 12-12-01
Product certifications	EAC DNV-GL RCM ABS
	cULus LR
	CE UKCA cULus HazLoc

Environmental characteristic	Ordinary and hazardous location
Resistance to electrostatic discharge	8 kV in air conforming to IEC 61000-4-2 4 kV on contact conforming to IEC 61000-4-2
Resistance to electromagnetic ïelds	10 V/m 80 MHz1 GHz conforming to IEC 61000-4-3 3 V/m 1.4 GHz2 GHz conforming to IEC 61000-4-3 1 V/m 22.7 GHz conforming to IEC 61000-4-3
Resistance to magnetic fields	30 A/m 50/60 Hz conforming to IEC 61000-4-8
Resistance to fast transients	2 kV (power lines) conforming to IEC 61000-4-4 2 kV (relay output) conforming to IEC 61000-4-4 1 kV (I/O) conforming to IEC 61000-4-4 1 kV (Ethernet line) conforming to IEC 61000-4-4 1 kV (serial link) conforming to IEC 61000-4-4
Surge withstand	2 kV power lines (AC) common mode conforming to IEC 61000-4-5 2 kV relay output common mode conforming to IEC 61000-4-5 1 kV I/O common mode conforming to IEC 61000-4-5 1 kV shielded cable common mode conforming to IEC 61000-4-5 0.5 kV power lines (DC) differential mode conforming to IEC 61000-4-5 1 kV power lines (AC) differential mode conforming to IEC 61000-4-5 1 kV relay output differential mode conforming to IEC 61000-4-5 0.5 kV power lines (DC) common mode conforming to IEC 61000-4-5
Resistance to conducted disturbances	10 V 0.1580 MHz conforming to IEC 61000-4-6 3 V 0.180 MHz conforming to Marine specification (LR, ABS, DNV, GL) 10 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to Marine specification (LR, ABS, DNV, GL)
Electromagnetic emission	Conducted emissions - test level: 79 dBμV/m QP/66 dBμV/m AV ( power lines (AC)) at 0.150.5 MHz conforming to IEC 55011 Conducted emissions - test level: 73 dBμV/m QP/60 dBμV/m AV ( power lines (AC)) at 0.5300 MHz conforming to IEC 55011 Conducted emissions - test level: 12069 dBμV/m QP ( power lines) at 10150 kHz conforming to IEC 55011 Conducted emissions - test level: 63 dBμV/m QP ( power lines) at 1.530 MHz conforming to IEC 55011 Radiated emissions - test level: 40 dBμV/m QP class A ( 10 m) at 30230 MHz conforming to IEC 55011 Conducted emissions - test level: 7963 dBμV/m QP ( power lines) at 1501500 kHz conforming to IEC 55011 Radiated emissions - test level: 47 dBμV/m QP class A ( 10 m) at 2001000 MHz conforming to IEC 55011
mmunity to microbreaks	10 ms
Ambient air temperature for operation	-1055 °C (horizontal installation) -1035 °C (vertical installation)
Ambient air temperature for storage	-2570 °C
Relative humidity	1095 %, without condensation (in operation) 1095 %, without condensation (in storage)
P degree of protection	IP20 with protective cover in place
pollution degree	<= 2
Operating altitude	02000 m
Storage altitude	03000 m
Vibration resistance	3.5 mm at 58.4 Hz on symmetrical rail 3.5 mm at 58.4 Hz on panel mounting 1 gn at 8.4150 Hz on symmetrical rail 1 gn at 8.4150 Hz on panel mounting
Shock resistance	147 m/s² for 11 ms

## **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.6 cm

Package 1 Width	14.0 cm
Package 1 Length	13.9 cm
Package 1 Weight	300.0 g
Unit Type of Package 2	S04
Number of Units in Package 2	20
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	6.983 kg
Unit Type of Package 3	P12
Number of Units in Package 3	240
Package 3 Height	105.0 cm
Package 3 Width	120.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	156 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	107
Environmental Disclosure	Product Environmental Profile

#### **Use Better**

<b>⊗</b> Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	C9e48184-76ce-4d1a-abc2-18108c652781
REACh Regulation	REACh Declaration
PVC free	Yes

#### Use Again


○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


## **Product datasheet**

## **TM221CE16T**

## **Dimensions Drawings**

#### **Dimensions**






## **Product datasheet**


## **TM221CE16T**

Mounting and Clearance

Mounting on a Rail





#### **Direct Mounting on a Panel Surface**



(1) Install a mounting strip


#### **Mounting Hole Layout**






#### **Mounting**

#### **Correct Mounting Position**

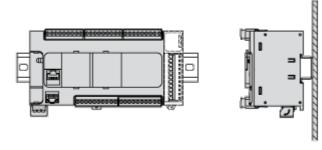


## **Acceptable Mounting Position**



#### **Incorrect Mounting Position**









#### Clearance




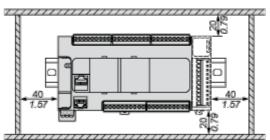



#### Connections and Schema

#### **Digital Inputs**




- (\*) Type T fuse
- (A) Sink wiring (positive logic).
- (B) Source wiring (negative logic).

#### **Connection of the Fast Inputs**




10, 11, 16, 17

#### **Transistor Outputs**

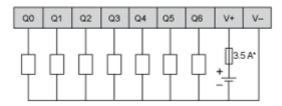


(\*) Type T fuse


#### **Connection of the Fast Outputs**



Q0, Q1

#### **Analog Inputs**



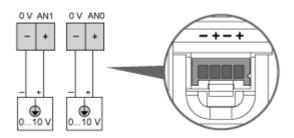


The (-) poles are connected internally.

Pin	Wire Color
0 V	Black
AN1	Red
0 V	Black
AN0	Red


#### **Ethernet Connection**




Pin N°	Signal	
1	TD+	
2	TD-	
3	RD+	
4	-	
5	-	
6	RD-	
7	-	
8	-	

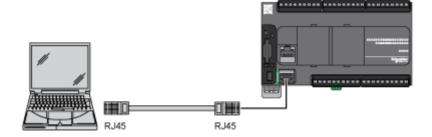

#### **USB Mini-B Connection**

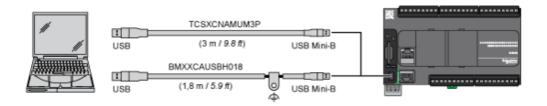

#### **SL1 Connection**




SL1

Ν°	RS 232	RS 485
1	RxD	N.C.
2	TxD	N.C.
3	RTS	N.C.
4	N.C.	D1
5	N.C.	D0
6	стѕ	N.C.
7	N.C*.	5 Vdc
8	Common	Common

N.C.: not connected


 $<sup>\</sup>ensuremath{^*}$  : 5 Vdc delivered by the controller. Do not connect.

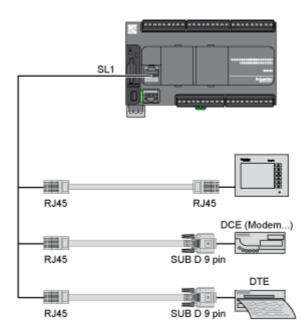

#### Performance Curves

#### **Derating Curves**


#### **Embedded Digital Inputs (No Cartridge)**

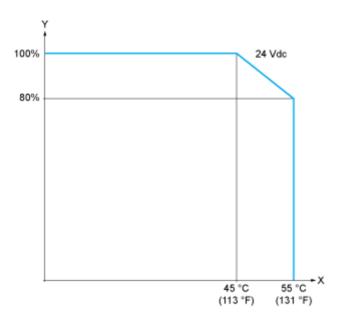

X: Ambient temperature

Y: Input simultaneous ON ratio

### **Embedded Digital Inputs (with Cartridge)**

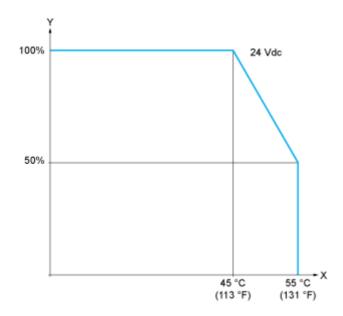


X: Ambient temperature

Y: Input simultaneous ON ratio

#### **Derating Curves**


#### **Embedded Digital Outputs (No Cartridge)**

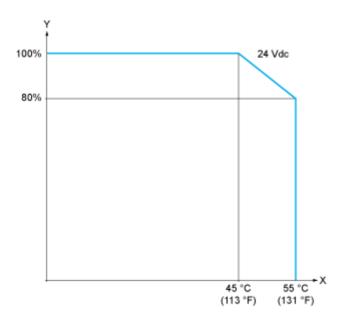

X: Ambient temperature

Y: Output simultaneous ON ratio

#### **Embedded Digital Outputs (with Cartridge)**

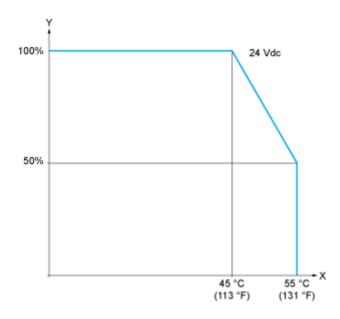

X: Ambient temperature

Y: Output simultaneous ON ratio

19