

# servo motor BMI 3-phase untapped IP54 multiturn - 32768 p/t x 4096 t - brake

BMI0702P07F

## Main

Range compatibility	Lexium 32i
Device short name	BMI
Product or component type	Serve motor with nower stage

## Complementary

o o in promontary	
Maximum mechanical speed	8000 rpm
[Us] rated supply voltage	208480 V - 1510 %
Supply voltage limits	208480 V
Network number of phases	Three phase
Supply frequency	50/60 Hz - 55 %
Network frequency limits	47.563 Hz
EMC filter	Integrated
Continuous output current	2 A at 8 kHz
Output current 3s peak	6 A at 400 V for 3 s
Continuous stall current	2 A
Continuous stall torque	2.48 N.m at 208480 V three phase
Peak stall torque	6.8 N.m at 208 V three phase 6.8 N.m at 400 V three phase 6.8 N.m at 480 V three phase
Nominal output power	400 W at 208 V three phase 800 W at 400 V three phase 900 W at 480 V three phase
Nominal torque	2.4 N.m at 208 V three phase 2.2 N.m at 400 V three phase 2 N.m at 480 V three phase
Nominal speed	1800 rpm at 208 V three phase 3600 rpm at 400 V three phase 4400 rpm at 480 V three phase
Maximum current Irms	9.6 A at 208 V, three phase 9.6 A at 400 V, three phase 9.6 A at 480 V, three phase
Product compatibility	Drive control unit LXM32i CANopen Drive control unit LXM32i EtherCAT
Shaft end	Untapped
Second shaft	Without second shaft end
Shaft diameter	11 mm
Shaft length	23 mm

Feedback type	Absolute multiturn SinCos Hiperface
Speed feedback resolution	32768 points/turn x 4096 turns
Holding brake	With
Holding torque	3 N.m holding brake
Mounting support	International standard flange
Motor flange size	70 mm
Electrical connection	Printed circuit board connector
Torque constant	1.15 N.m/A at 20 °C
Back emf constant	77.18 V/krpm at 20 °C
Number of motor poles	10
Rotor inertia	1.24 kg.cm²
Stator resistance	8.89 Ohm at 20 °C
Stator inductance	25.75 mH at 20 °C
Stator electrical time constant	2.9 ms at 20 °C
Maximum radial force Fr	710 N at 1000 rpm 560 N at 2000 rpm 490 N at 3000 rpm 450 N at 4000 rpm 410 N at 5000 rpm 390 N at 6000 rpm
Maximum axial force Fa	0.2 x Fr
Brake pull-in power	5 W
type of cooling	Natural convection
Length	306 mm
Number of motor stacks	2
Centring collar diameter	60 mm
centring collar depth	2.5 mm
Number of mounting holes	4
Mounting holes diameter	5.5 mm
Circle diameter of the mounting holes	7582 mm
Distance shaft shoulder-flange	2.5 mm

## **Environment**

IP degree of protection Shaft: IP54
Housing: IP65

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	25.8 cm
Package 1 Width	20.0 cm
Package 1 Length	59.0 cm
Package 1 Weight	5.4 kg
Unit Type of Package 2	P06

Number of Units in Package 2	8
Package 2 Height	77.0 cm
Package 2 Width	80.0 cm
Package 2 Length	60.0 cm
Package 2 Weight	51.7 ka

# **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability

0	<b>Environmental</b>	faatamint
~	Environmental	TOOLDTITL

Environmental Disclosure

Product Environmental Profile

#### **Use Better**

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
PVC free	Yes


#### **Use Again**

○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

## **Dimensions Drawings**

## **External Dimensions**

## With Standard Braking Resistor

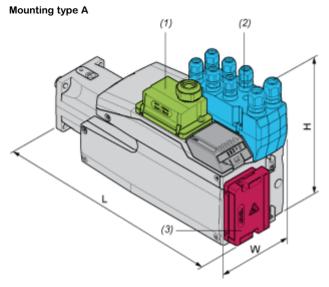

- (1) Module for supply voltage
- (2) I/O module
- (3) Standard braking resistor


#### Dimensions in mm

W	Н	L
99	187	327

### Dimensions in in.

Diffictionoria in in.		
W	H L	
3,90	7,36	12,87

## Mounting type B

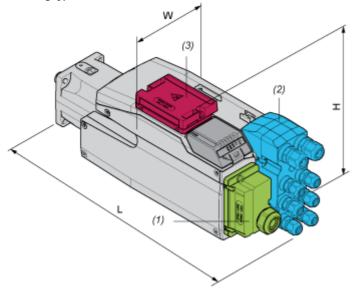

- (1) Module for supply voltage
- (2) I/O module

## BMI0702P07F

(3) Standard braking resistor


nsions	

W	Н	L
99	138,5	376

#### Dimensions in in.

W	Н	L
3,90	5,45	14,8

## With External Braking Resistor

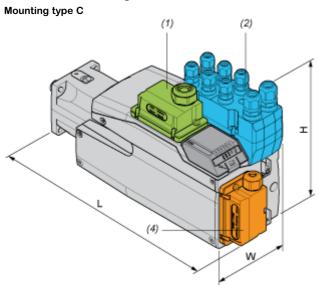

- (1) Module for supply voltage
- (2) I/O module
- (4) External braking resistor

### Dimensions in mm

W	Н	L
99	187	339


#### Dimensions in in.

W	W H L		
3,90	7,36	13,35	

## Mounting type D

## **Product datasheet**

## BMI0702P07F

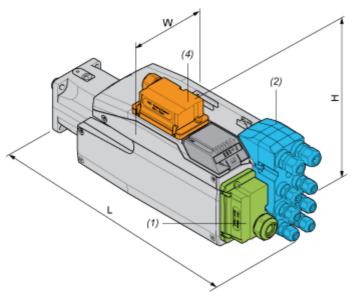


- (1) Module for supply voltage
- (2) I/O module
- External braking resistor (4)

#### Dimensions in mm

W	Н	L
99	160	376

#### Dimensions in in.

D					
W	Н	L			
3,90	6,3	14,8			

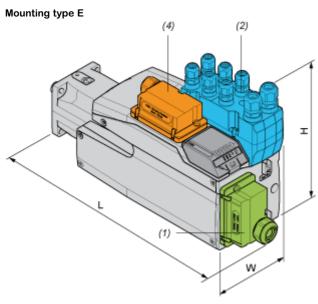

- Module for supply voltage (1)
- (2) I/O module
- (4) External braking resistor


## Dimensions in mm

W	Н	L
99	187	366

Dimensions in in.

W	Н	L
3,90	7,36	14,41

## Mounting type F

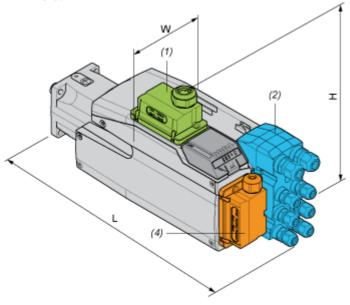

- (1) Module for supply voltage
- (2) I/O module
- (4) External braking resistor

#### Dimensions in mm

W	H L					
99	180	376				


## Dimensions in in.

Difficiono de la lit.					
W	H L				
3,90	7,09	14,8			

## Performance Curves

## **Performance Curves**

## Torque/Speed Curves with 208 V Three Phases Supply Voltage

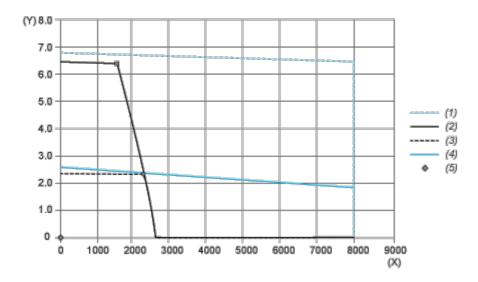


- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		1013 W	1520 rpm	6.36 N.m
max Cont. Power (Drive)	•	519 W	2240 rpm	2.21 N.m

## **Performance Curves**

## Torque/Speed Curves with 400 V Three Phases Supply Voltage

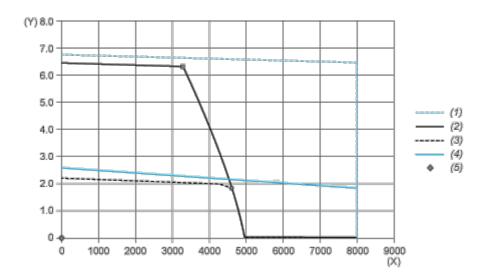


- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		2161 W	3280 rpm	6.29 N.m
max Cont. Power (Drive)	•	892 W	4560 rpm	1.87 N.m

## **Performance Curves**

## Torque/Speed Curves with 480 V Three Phases Supply Voltage

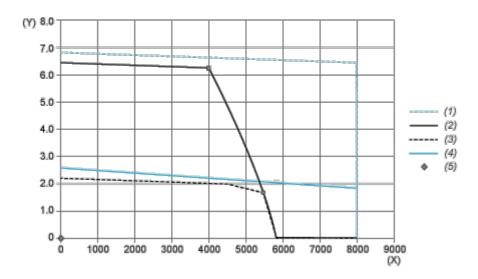

- (X) Speed (rpm)
- (Y) Torque (N.m)
- (1) Motor peak
- (2) Drive peak
- (3) Drive cont
- (4) Motor cont
- (5) Operating point

		Power	At Speed	With Torque
max. Peak Power		2623 W	4000 rpm	6.26 N.m
max Cont. Power (Drive)	•	943 W	5600 rpm	1.61 N.m